


# Reflection Series

HIGH PERFORMANCE

MODULAR LUXURY CARPET TILES



PVC BACKED CARPET TILES



Infinity<sup>TM</sup>  
Commercial Carpet Tiles







**HOSPITALITY**



**STUDIOS**



**COMMERCIAL**



**INSTITUTES**



**HEALTHCARE**



**RESIDENTIAL**

## Residential

Explore the potential of carpets at home. As a flexible option to decorating, carpets can alternate between themes with minimal disruption to an existing space.

## Institutions

Infinity carpet tiles offers exclusive range which is perfect for all types of high traffic environments such as educational institutions. Select from our diverse selection of designs, patterns and colors to establish a design scheme.

## Hospitality


Our Carpet tiles offers hard wearing carpet tiles such as hotels, cafes and other high traffic areas.

## Commercial


No matter whatever commercial space, our carpet tile will perform to its best.



R-101

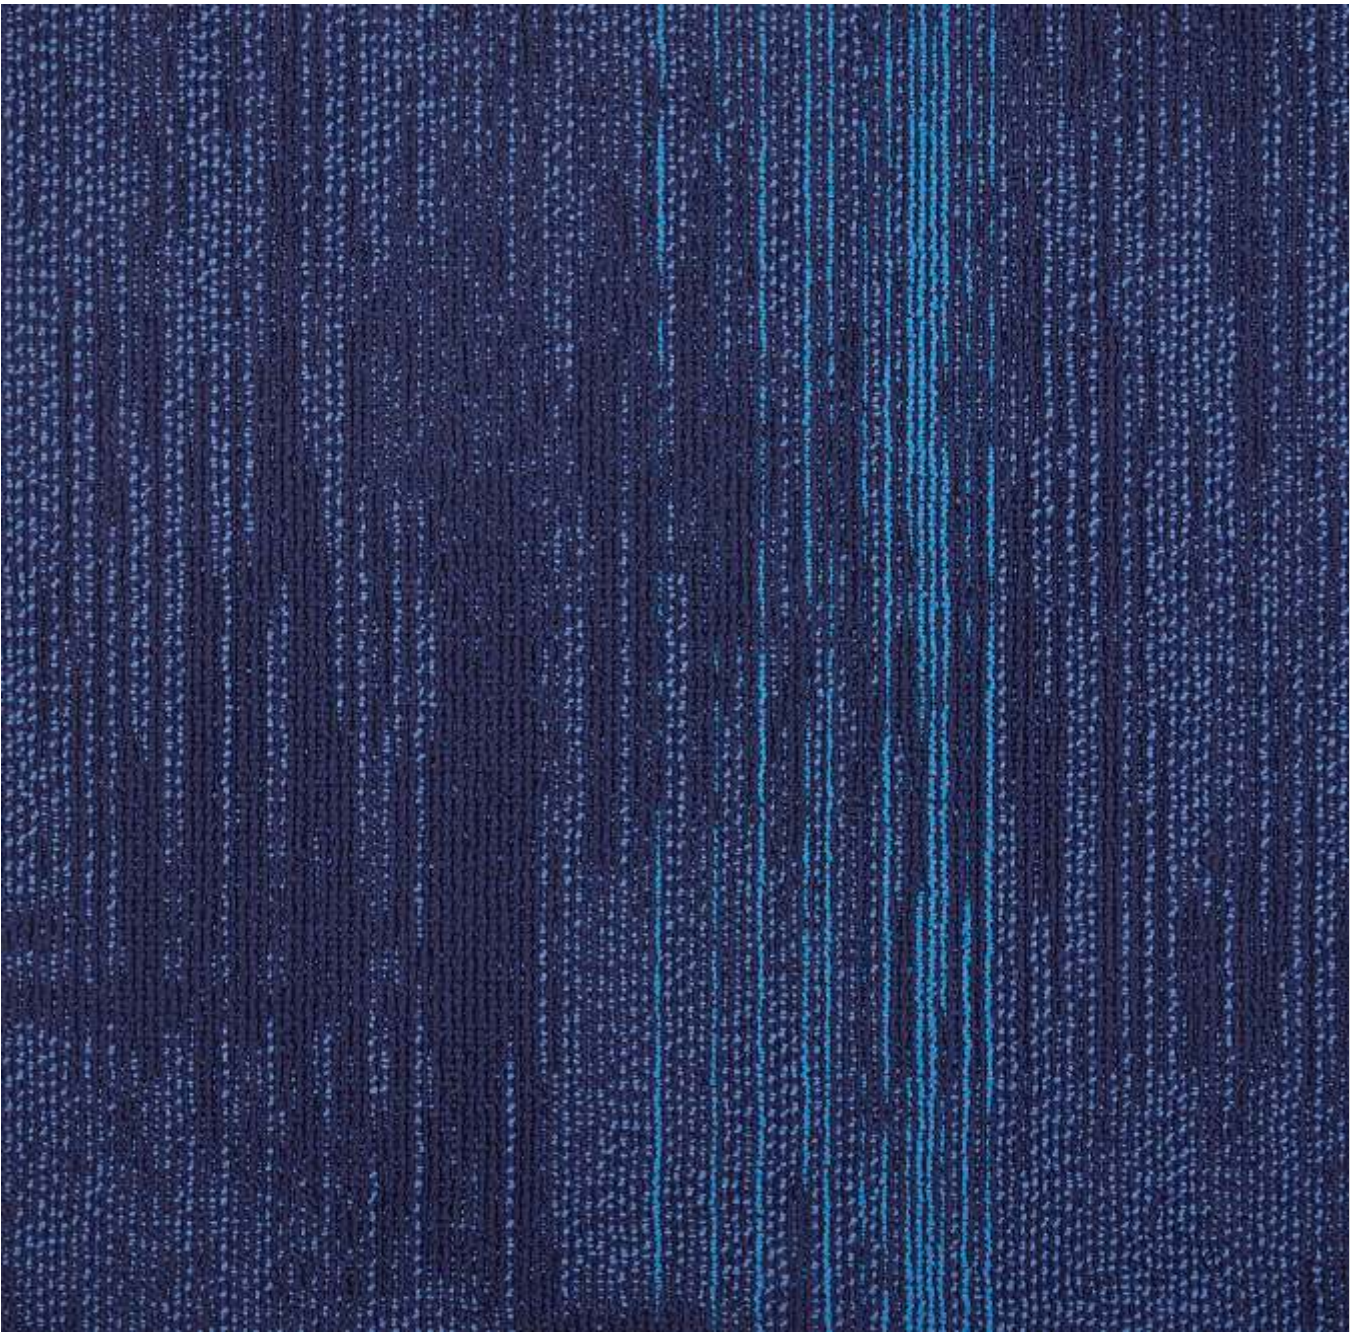

R-501

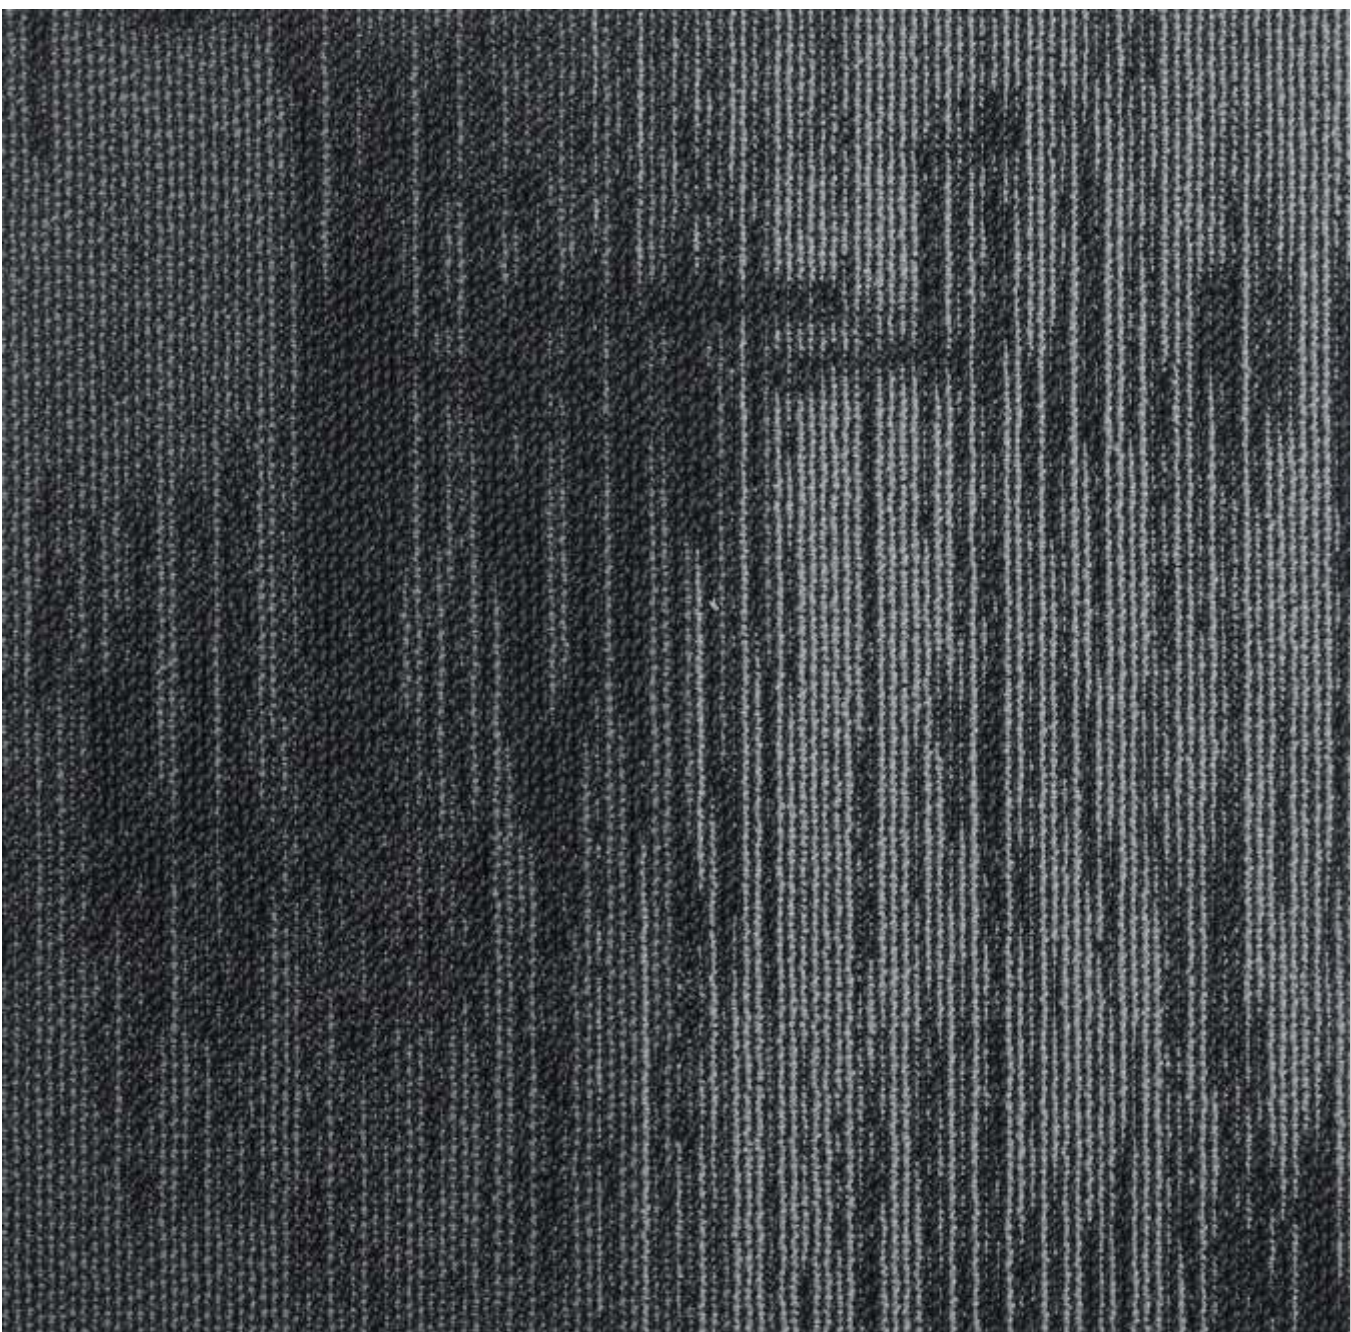

R-201



High Quality Backing for  
Stable Installation



SPECIFICATIONS

Construction: <b>Multi-Level Loop</b>	Primary Backing: <b>Polyester Spunbonded</b>
Pile Fiber Composition: <b>100% PP</b>	Pile Weight: <b>680g/m2</b>
Tufting Gauge: <b>1/12”</b>	Backing Structure: <b>Glass Reinforced PVC</b>
Dye Method: <b>Solution Dyed</b>	Product Size: <b>50cm*50cm /piece</b>
Total Height: <b>Approx 5- 6.0mm</b>	Recommended Installation: <b>Monolithic</b>
Pile Height : <b>3.5mm ±(0.5mm)</b>	QuarterTurned, Ashlar, Brick














Quarter Turned


R-501





Quarter Turned






Brick


R-101+R501






Brick





Brick





Quarter Turned

R-501






R-501

**PERFORMANCE SPECIFICATIONS**

- Colourfastness :** Grade  $\geq 4$  (AATCC Test Method)
- : Result:** 6 = OK
- Flammability:** Passed (GB/T1476B-1993)
- Static Propensity:**  $\approx 3.0$  kV (AATCC-134, GB/T 18044-2000)

Recommended Installation Methods

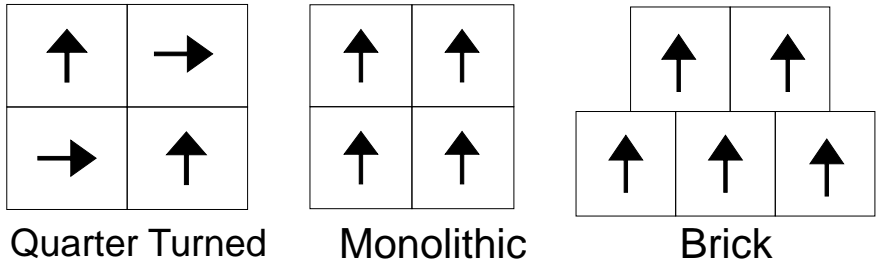



















Quarter Turned







Static Electricity  
Permanent Lifetime Protection-less than  
3.5kv



Lodging Resistant  
Superior resilience of fiber suitable for  
wheels




Anti rubbing and feet trample because  
of fiber properties.




Dimensional stability  
Not to change size by more then  
0.5mm in normal use




Superior Sound insulation effect.



Color Fastness to rubbing  
According to GB/T3920-2008 standards it is Grade  
4 for dry rubbing Grade 3 for wet rubbing



Sustainability  
All yarns used are solution dyed to minimize use  
water and exclude any effluent production  
ISO14001 & ISO9001



Installation  
Tackifier or releasable adhesive recommended

